
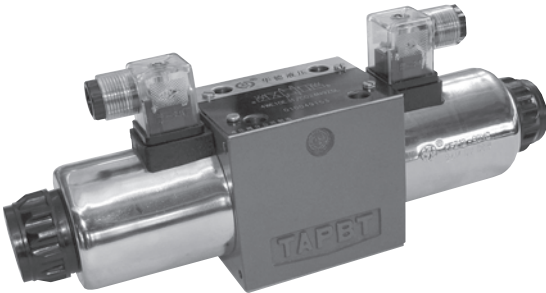


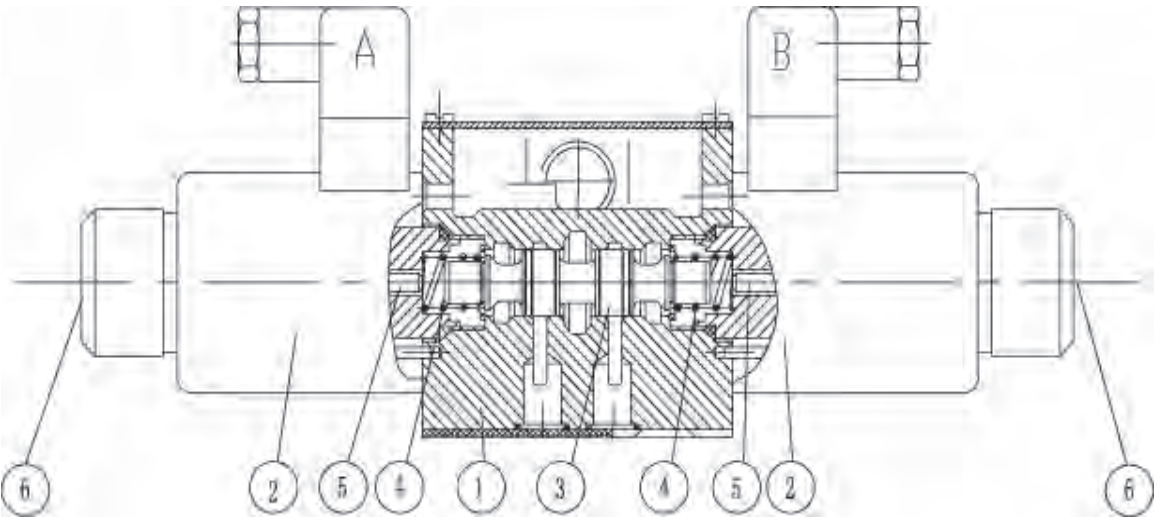

	Directional control valves Type WE 10...30B/			RE 23316/12.2004
	Size 10	up to 31.5 MPa	up to 120L/min	Replaces: RE 23316/05.2001
Features: -Direct solenoid operated directional spool valve as standard version -Wet pin DC or AC solenoids with removable coils -perfect outline -Coils may be replaced without opening the pressure-tight chamber -Choice of either central or individual electrical connections -Optional hand over-ride -long life -Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H 				
Functional, section Directional valves basically comprise the housing (1), one or two solenoids (2), control spool (3), and one or two return springs (4).At rest, control spool (3) is held in its central or initial position by means of return springs (4) (except in the case of impulse spools). Control spool (3) is operated by wet pin solenoids (2).The force of solenoid (2) acts on control spool (3) and moves it from its rest position to the desired end position. This permits free flow from P to A and B to T or P to B and A to T. On de-energizing solenoid (2) control spool (3) is returned to its initial position by return spring (4). Optional hand over-ride (5) permits control spool (3) to be moved without the solenoids being energized.  Type 4WE 10 ...30B/...C				

Ordering code

	WE	10		31	B /	C										G	
3 service ports = 3 4 service ports = 4																Further details in clear text	
Size 10 = 10																No code = mineral oils V = phospate ester	
Symbols see below																No code = Without cartridge throttle B08= Throttle, Φ 0.8 mm B10 = Throttle, Φ 1.0 mm B12= Throttle, Φ 1.2 mm	
Series 30 to 39 = 31 (30 to 39: unchanged installation and connection dimensions)																	
Technology of Beijing Huade Hydraulic =B																	
With spring return = No code Without spring return, but with detent = OF Without spring return = O																	
Wet pin solenoid with removable coil = C																	
W220= 220 V AC 50 or 240V AC 60 Hz G24= 24 V DC W220R = DC solinoid commuting automatically																	
With protected hand override (standard) = N9 Without hand override = No code With hand override = N																	
Individual connections : With component plug without plug-in connector =K4 Normal plug =Z4 Large angled plug =Z5 Large angled plug with indicator light =Z5L Central connection: Cable entry at side = No code Cable entry in cover, with lamp = DL Central connection in cover, with lamp (without angled plug-in connector) = DKL																	

Symbols



4) Example:

Spool E with switching position "a"

Ordering code ..EA..

Spool E with switching position "b"


Ordering code...EB...

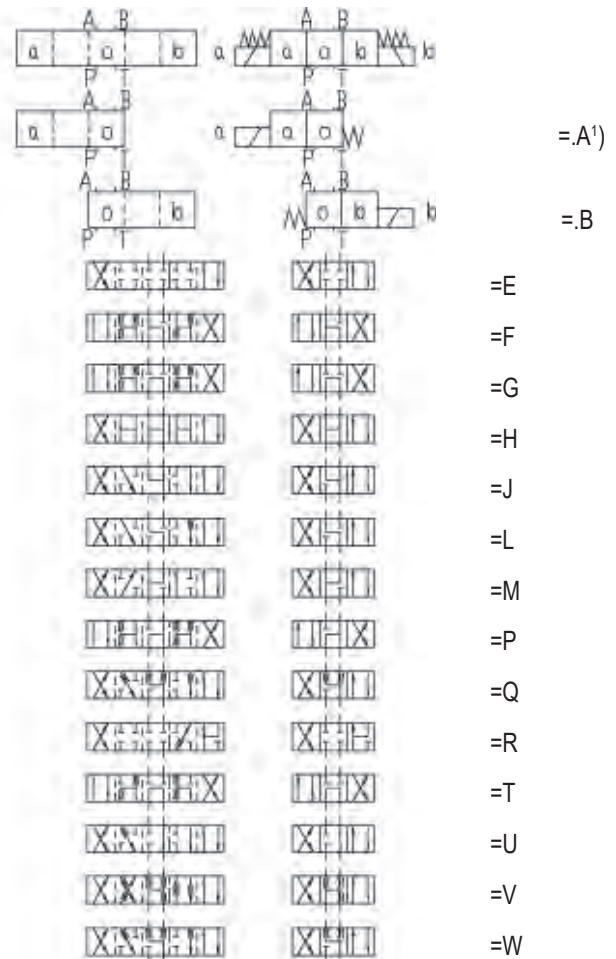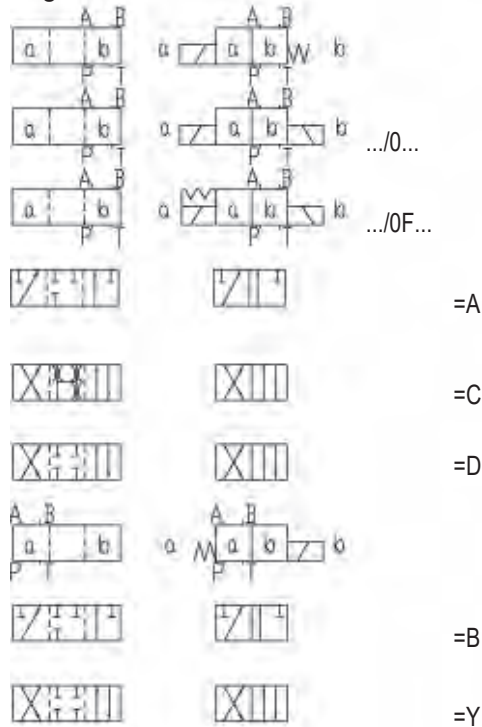

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

7 Symbol "R " in switched position A → B

8 Symbols "G " and "T " in mid position $P \rightarrow T$

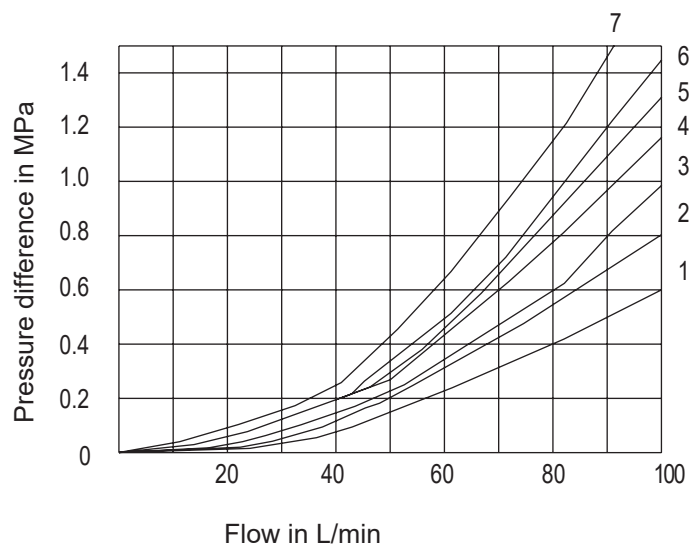

Symbols	Direction of flow			
	P-A	P-B	A-T	B-T
A, B	2	2	-	-
C, D, Y, J	2	2	3	3
E, Q, V	2	2	4	4
F	2	3	3	5
G	3	3	4	6
H	1	1	4	5
L,U	2	2	3	5
M	1	1	5	1
P	3	2	5	3
R	2	4	3	-
T	3	5	5	6
W	2	2	5	5




Switching power limits (measured at v = 41 mm²/s and t = 50°C)

The given switching power limits are for applications with two flow directions (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces active within the valves the permissible switching power limit may be significantly less if there is only one direction of flow (e.g. from P to A and port B blocked)!

(Please consult us for applications of this kind.)


The switching power limits were measured with the solenoids at operating temperature, 10% under voltage and without tank back pressure.

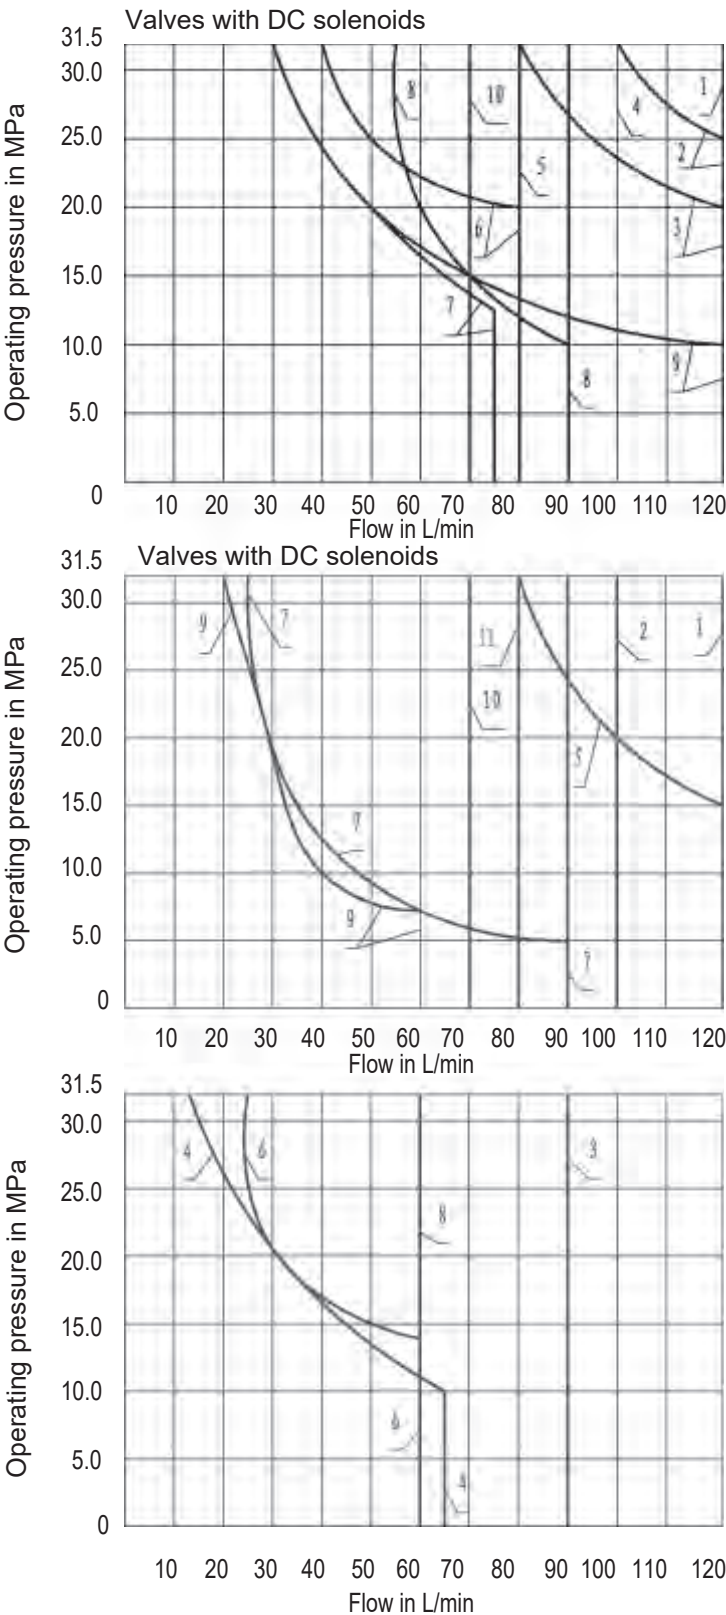

Curve	Symbols
1	C,D/O,C/O/F D,D/O,D/O/F Y,M
2	E
3	A/O,A/O/F L,U,J,Q,W
4	H
5 ¹⁾	R
6	G
7	T
8	F,P
9	A,B
10	V

42V,50Hz;110V,50Hz;120V,60Hz; 127V,50Hz;220V,50Hz;240V,60Hz	
Curve	Symbols
1	C,C/O,C/O/F D,D/O,D/O/F Y
2	E,L U,Q,W
3	M
4	A,B
5	A/O,A/O/F,J
6	G
7	F,P
8	V
9	T
10	H
11	R

Switching power limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

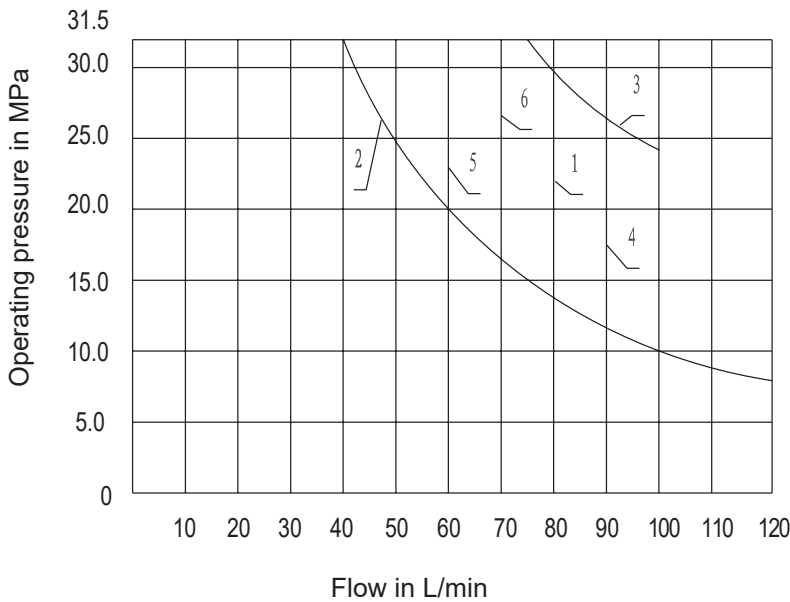

42V,60Hz,110V,60Hz 127V,60Hz,220V,60Hz	
Curve	Symbols
1	C,C/O,C/OF D,D/O,D/OF Y
2	A/O,A/OF
3	E
4	M
5	V
6	H
Switching power limits for other spools on enquiry!	


Technical data

Operating pressure max.	Ports A, B, P (MPa)	31.5
	Ports T (MPa)	16
Flow max. (L/min)		120
Cross section (switching position 0):		With symbol Q approx. 6 % of the nominal area With symbol W approx. 3 %
Pressure fluid		Mineral oils(for NBR seal) or phosphate ester(for FPM seal)
Pressure fluid temperature range (°C)		-30 ~ + 80
Viscosity range (mm ² /s)		2.8 ~ 500
Weight (kg)	Valve with 1 solenoid	5.1(DC), 4.3(AC)
	Valve with 2 solenoids	6.7(DC), 5.1(AC)


For symbols A and B, port T must be used as a drain line, if the operating pressure is higher than the permissible tank pressure.

Unit dimensions with DC solenoids

Individual connection

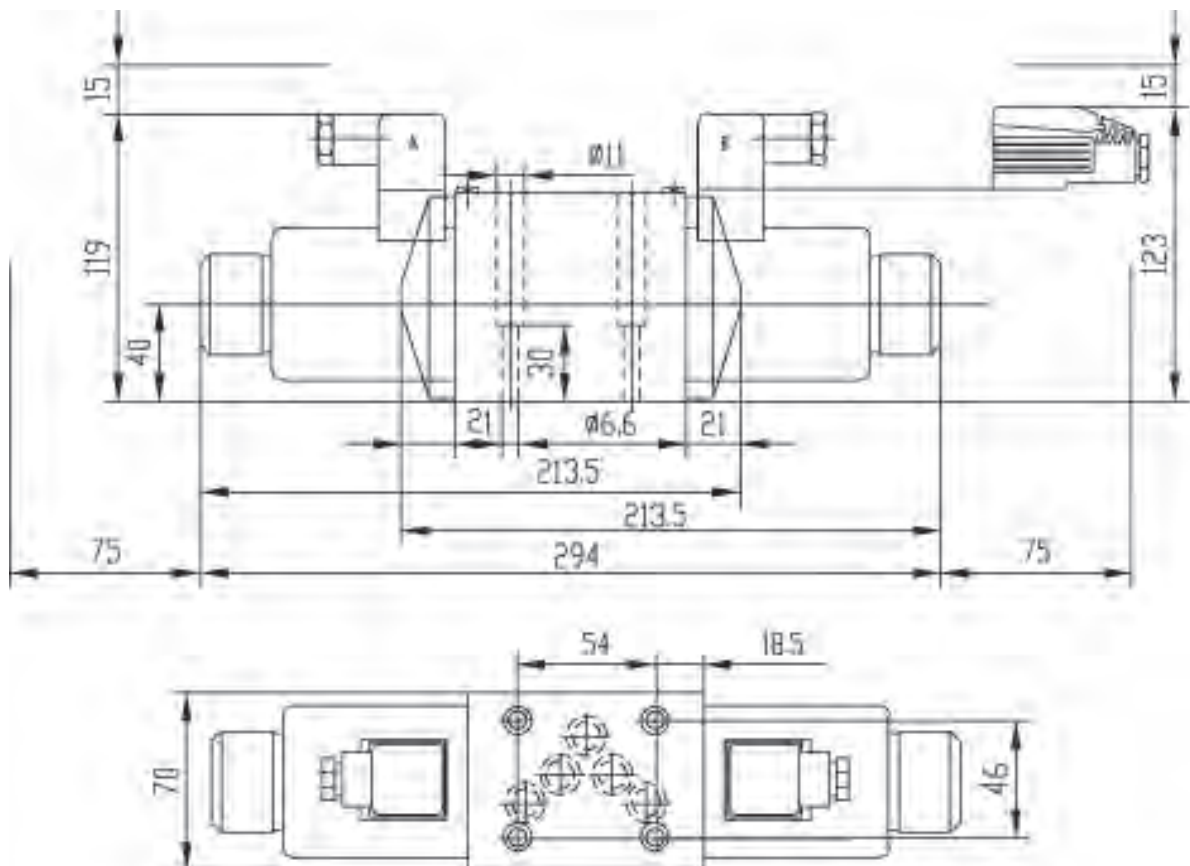

Central connection

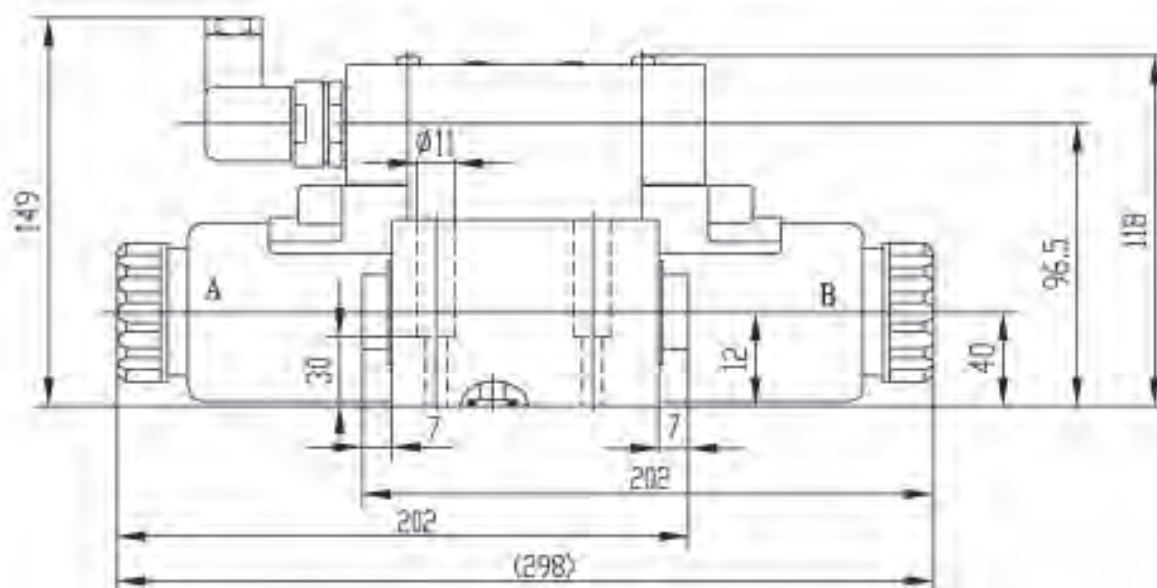

Valve fixing screws: 4-M6x40-10.9 (GB/T70.1-2000)

$$M_A = 15 \text{ N.m}$$


Subplate: G66/01(G3/8 ") G66/02(M18x1.5)

G67/01(G1/2 ") G67/02(M22x1.5)

G534/01(G3/4 ") G534/02(M22x1.5)



(see page 206)

Required surface finish of mating piece






Unit dimensions with AC solenoids

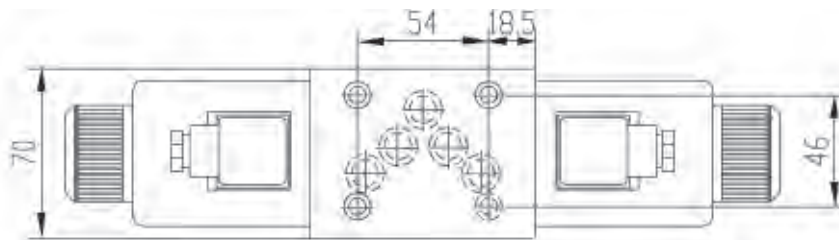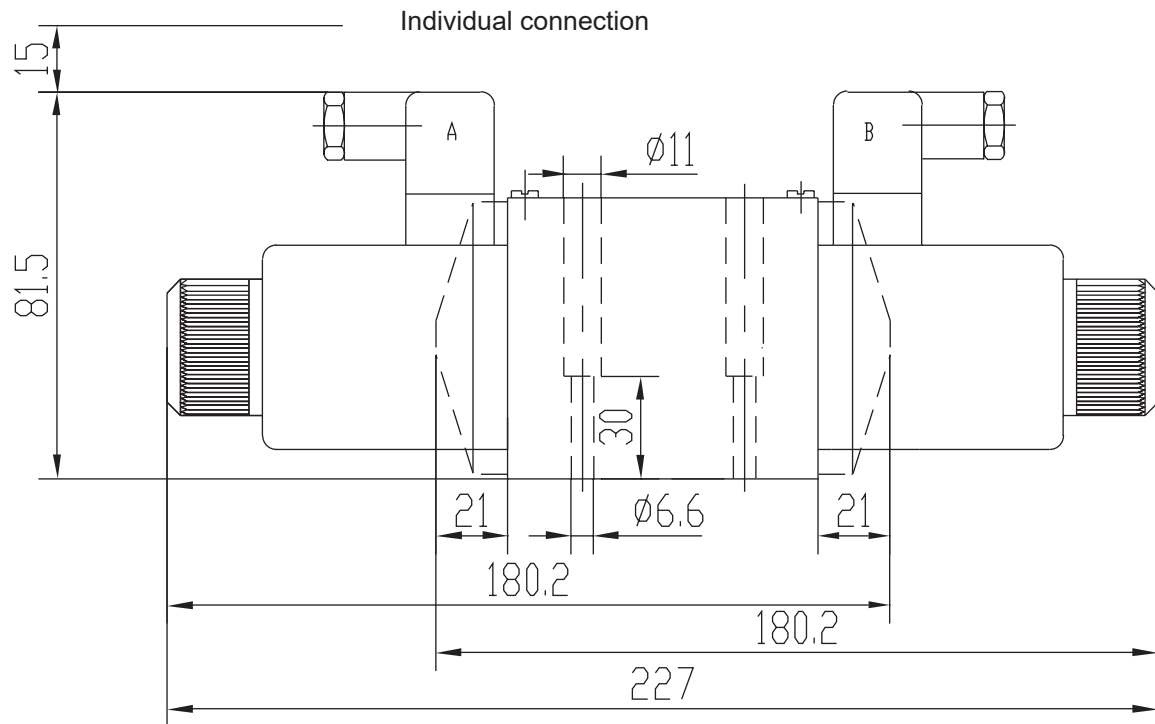

Central connection

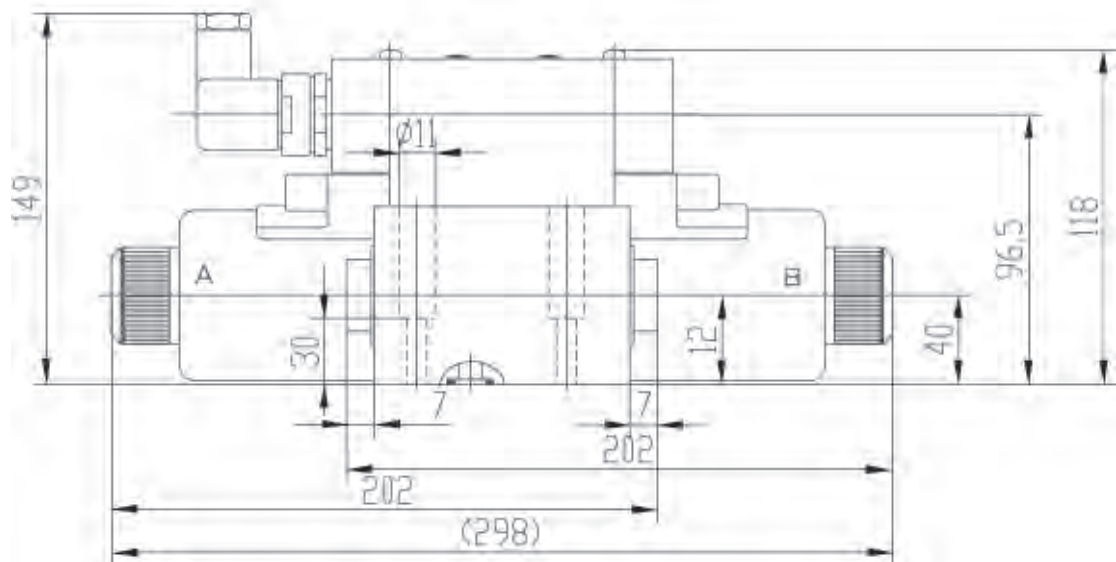

Valve fixing screws: 4-M6x40-10.9 (GB/T70.1-2000)

$M_A = 15 \text{ N.m}$

Subplate: G66/01(G3/8 ") G66/02(M18x1.5)

G67/01(G1/2 ") G67/02(M22x1.5)

G534/01(G3/4 ") G534/02(M22x1.5)

(see page 206)

Required surface finish of
mating piece

